


PIN	1	2	3	4	5	6	7	8
CONNECTION	VDD	LED+	VSS	SI	SCLK	A0	/RST	/CSI



- Specification:
- 1). Driving: Duty: 1/65, Bias:1/9, VLCD:9.0V, VDD:3.0V
 - 2). Viewing angle: 60°clock
 - 3). Display mode: FSTN/Transmissive
 - 4). Operating temp.: -10°C~+60°C
Storage temp.: -20°C~+70°C
 - 5). IC: ST7565
 - 6). Backlight: LED, White

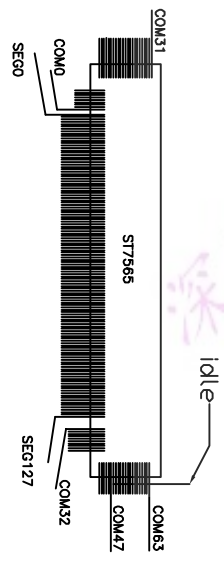

深圳市科飞研科技有限公司

Dwg Title
COG12848TM-A

Dwg No. _____ Date 2010-01-08

Scale _____ Unit mm Tol. ±0.2

Drawn DDU Checked _____ Approved _____