



PIN ASSIGNMENT







NOTES:

1. DISPLAY TYPE: STN/Y-G
2. OPERATING VOLTAGE: 3.3V
3. OPERATING TEMPERATURE: -20°C~+70°C
4. STORAGE TEMPERATURE: -30°C~+80°C
5. DRIVE MODE: 1/64D, 1/9B
6. VIEWING DIRECTION: 6:00
7. POLARIZER TYPE: TRANSPARENT, POSITIVE
8. DRIVE IC: ST7565
9. LCD DRIVER VOLTAGE: VOP=9.6V

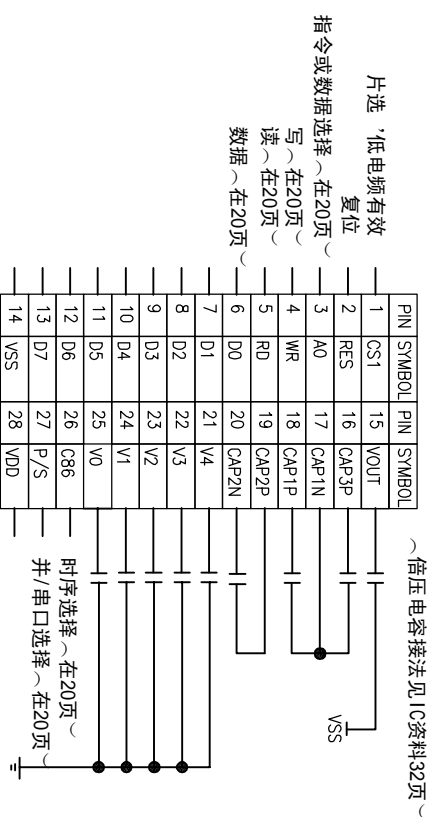

Dwg Title		Date	
C0G12864-20-01Y-28C05-60		2007-12-18	
Dwg No.	Unit	Tol.	Checked
	mm	±0.2	Approved
Scale	Unit	Tol.	Checked
	mm	±0.2	Approved
Drawn	Unit	Tol.	Checked
HY	mm	±0.2	Approved

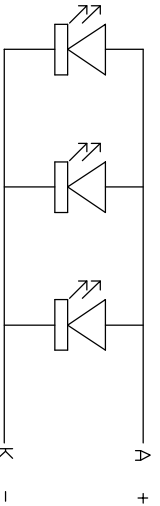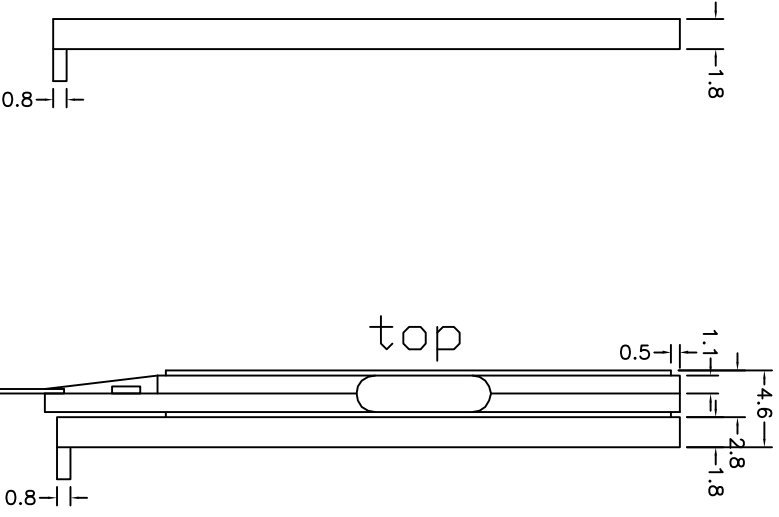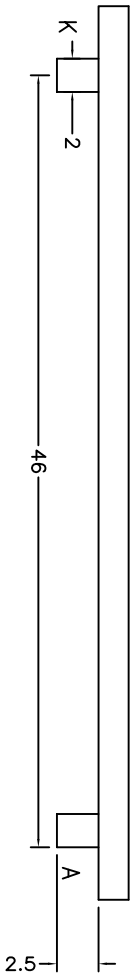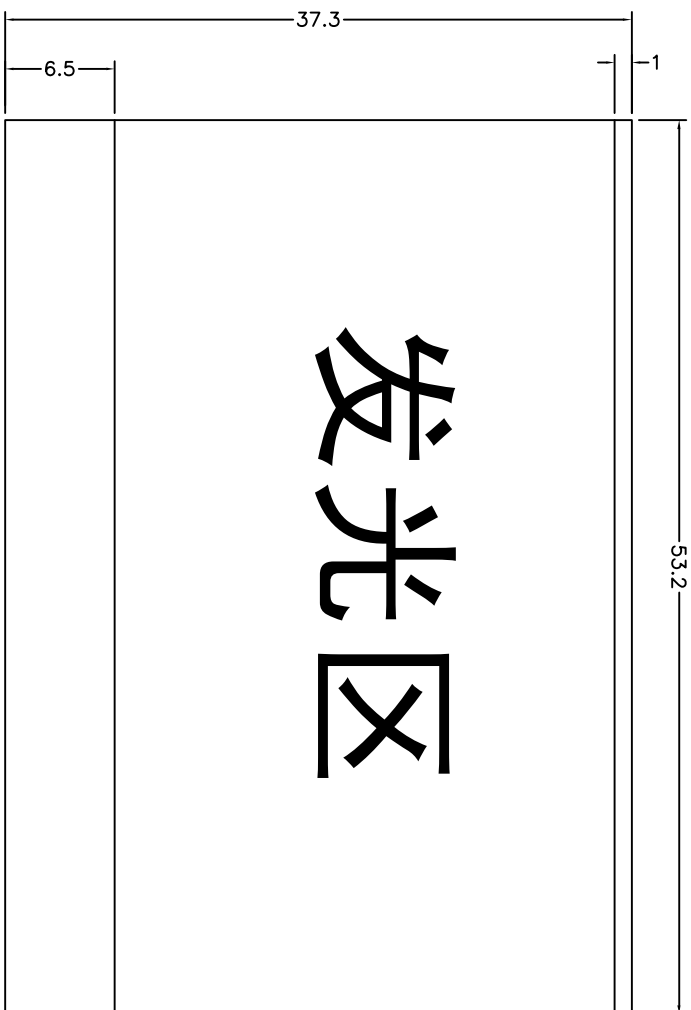

电压 VDD:3.0V  
 电流 35mA~45mA

LCD+BL



Dwg Title		CDG12864-20 BL Y-G	
Dwg No.		Date	
Scale		2009-9-17	
Unit	Tol.	mm	±0.2
Drawn	Checked	HY	Approved