

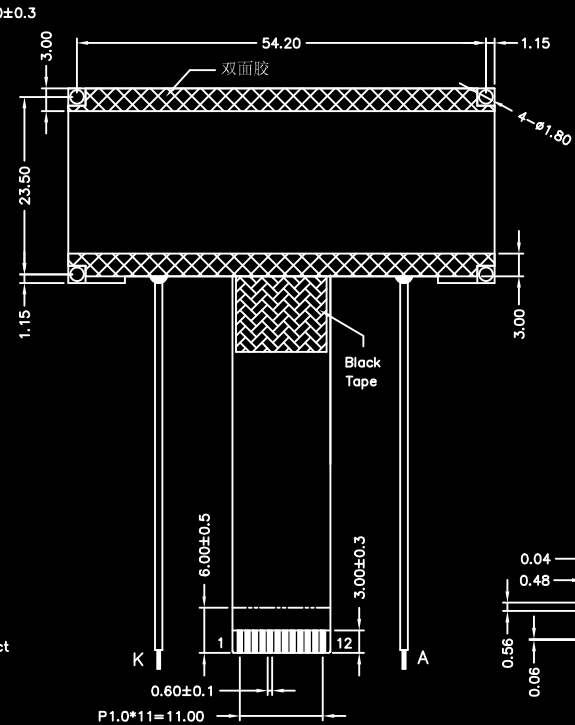
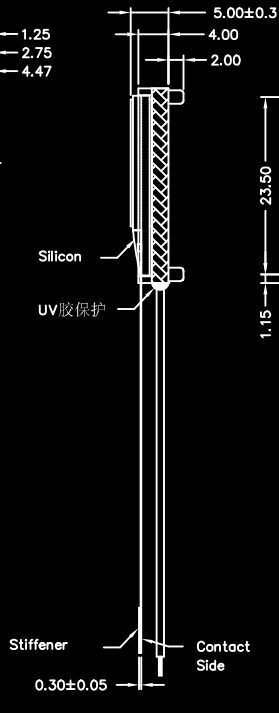
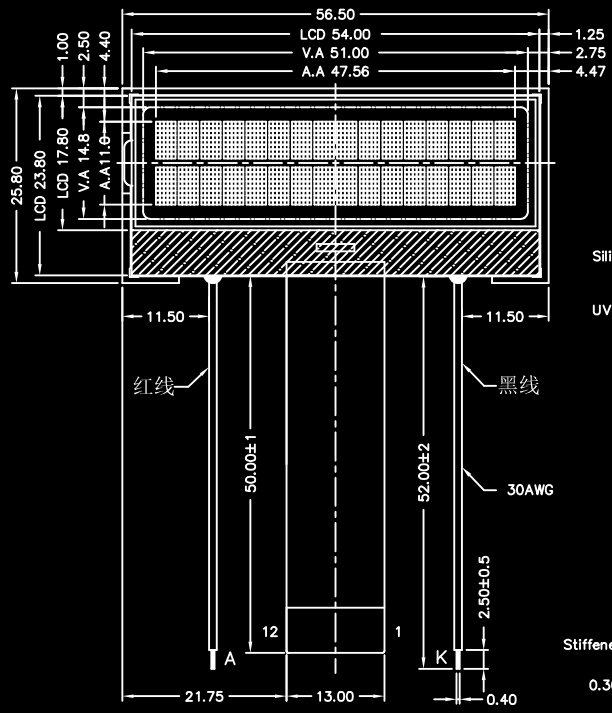


REV.	DESCRIPTION	REVISER	DATE
A0	First issue	Liu Gong	2016-10-28
A1	在HFG1602-34基础上增加一款蓝膜负显	Liu Gong	2017-1-18



PIN NO.	NAME
1	XRESTE
2	DB6
3	DB7
4	VSS
5	DIRC
6	SHL
7	VDD
8	VIN
9	VOUT
10	CAP1P
11	CAP1N
12	NC

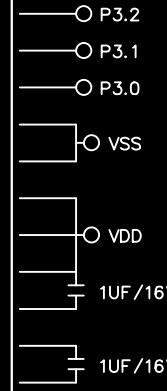

- Specifications:
1. Display Mode: STN/Blue/Transmissite/Negative.
 2. Viewing Angle: 12:00 O'clock.
 3. Drive Method: 1/16 Duty, 1/5 Bias, Vlcd=5.6V, VDD=3.3V.
 4. Backlight Type: White, 3.0V, 45mA (3LEDs).
 5. Top: -20°C~+70°C, Tst: -30°C~+80°C.
 6. Connector: COG+FPC
 7. Drive IC: SPLC792A-002A
 8. Customer P/N: --
 9. With " * " Mark Dimensions Are Important Dimensions.

深圳市科飞研科技有限公司

Unspecified Tolerance: ±0.20	UNITS: mm	DATE:	MODEL NUMBER :		SHEET: 1 OF 1
DESIGN BY: Liu Gong	2017-1-18	HSG1602-39			NAME: LCM
CHECKED BY:		DO NOT SCALE THIS DRAWING.			PROJECTION
APPROVED BY:					