

<h1>G240128-3</h1>	240 DOTS×128 DOTS	1/128 DUTY	1/12 BIAS
--------------------	-------------------	------------	-----------

FEATURE:

LCD TYPE	STN/FSTN
LCM BACKLIGHT TYPE	EL/FL/LED BACKLIGHT
LCM CONTROLLER IC	BUILT IN T6963C OR EQUIVALENT
POWER SUPPLY FOR LCM	DC +5.0V
LED BACKLIGHT INPUT	DC +5.0V
EL BACKLIGHT INPUT	---
EL INVERTER	---
FL BACKLIGHT INPUT	---
FL INVERTER	---
LCM DIMENSION	144.0×104.0×10.5(13.0) mm
LCM VIEWING AREA	114.0×64.0 mm
LCD DOT SIZE	0.44×0.44 mm
LCD DOT PITCH	0.48×0.48 mm

3.ABSOLUTE MAXIMUM RATINGS:

ITEM	SYM	MIN	TYP	MAX	UNIT
OPERATING TEMP.	Top	-10	-	+70	
STORAGE TEMP.	Tst	-20	-	+80	
INPUT VOLTAGE	Vi	Vss	-	VDD	V
SUPPLY VOL. FOR LOGIC	VDD-VSS	-	-	7.0	V
SUPPLY VOL. FOR LCD	VDD-VEE	15.0	-	-	V


5.INTERFACE PIN CONNECTIONS:

NO	SYM	LEVEL	FUNCTION
1	FGND	-	FRAME GROUND
2	Vss	-	0V
3	VDD	-	+5V
4	Vo	-	CONTRAST ADJ.
5	WR	L	WRITE SIGNAL
6	RD	L	READ SIGNAL
7	CE	L	CHIP ENABLE SIGNAL
8	C/D	H/L	WR=L,C/D(H:COMMAND WRITE,L:DATA WRITE)
9	RES	L	CONTROLLER RESET
10	DB0	H/L	DATA BIT0
11	DB1	H/L	DATA BIT1
12	DB2	H/L	DATA BIT2
13	DB3	H/L	DATA BIT3
14	DB4	H/L	DATA BIT4
15	DB5	H/L	DATA BIT5
16	DB6	H/L	DATA BIT6
17	DB7	H/L	DATA BIT7
18	FS	H/L	CONNECT TO VDD6×8DOTS(TO VSS 8×8DOTS)
19	VEE	-	NEGATIVE VOLTAGE INPUT (-10.0V)
20	LED(+)	-	LED BACKLIGHT +5.0V

2.ELECTRICAL CHARACTERISTICS:

ITEM	SYM	CONDITION	MIN	TYP	MAX	UNIT
SUPPLY VOLTAGE FOR LOGIC	VDD-VSS	Ta = 2 5	4.5	5.0	5.5	V
SUPPLY VOLTAGE FOR LCD DRIVER	VEE-VSS	Ta = 2 5	-	-	-5.0	V
OPERATING VOL. FOR LCD MODULE	VDD-Vo	Ta = 2 5	-	13.0	-	V
INPUT HIGH VOL.	Vih	-	0.7VDD	-	VDD	V
INPUT LOW VOL.	Vil	-	0	-	0.3VDD	V
SUPPLY CURRENT FOR LOGIC	IDD	VDD=5.0V	-	-	15.0	mA
SUPPLY CURRENT FOR LCD	ILCD	Vo=-8.0V	-	-	20.0	mA
LED CURRENT	If	Ta = 2 5	-	100	-	mA
LED DISSIPATION	Pd	Ta = 2 5	-	500	-	mW

4. BLOCK DIAGRAM:

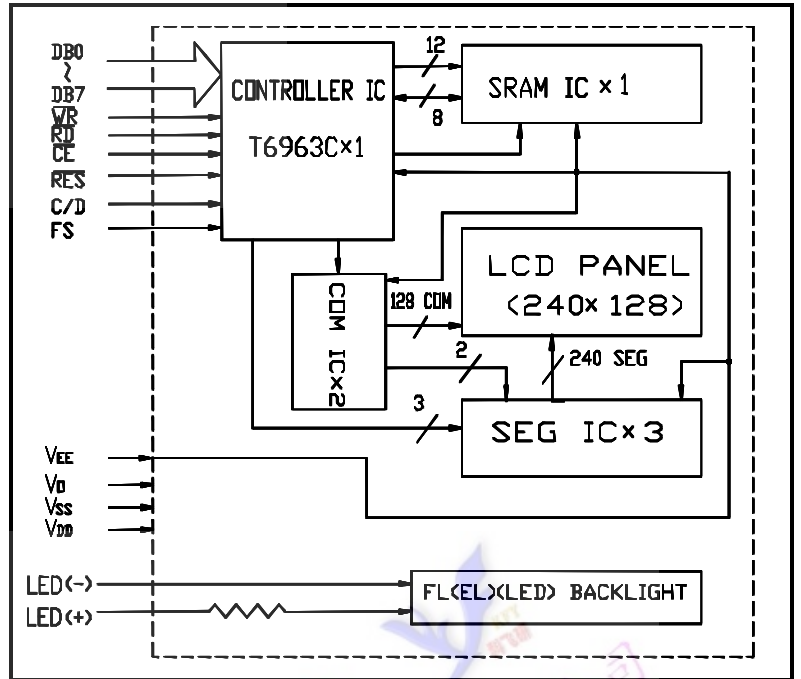

6.DIMENSIONAL DRAWING :

